

The CR40 has a more powerful motor and added flexibility of 6 speeds. Ideal for countersinking and using twist drills, this unit is supplied with a chuck as standard and is a great all round tool for both workshops and sites.

Part Code: **CR40/3** NOT AVAILABLE IN THE UK


Specifications

Cutter Capacity	40mm
Depth of Cut	50mm
Drill Chuck Capacity	13mm
No Load Speed	270-610RPM
Motor Specification	1100W
Magnet Adhesion	8000N
Length	265mm
Height	510mm
Width	180mm
Magnet Size	165 x 80mm
Weight	14kg
Motor	230V
Stroke	85mm



CR40

Completo di mandrino per punte da trapano + coppia spazzole di ricambio

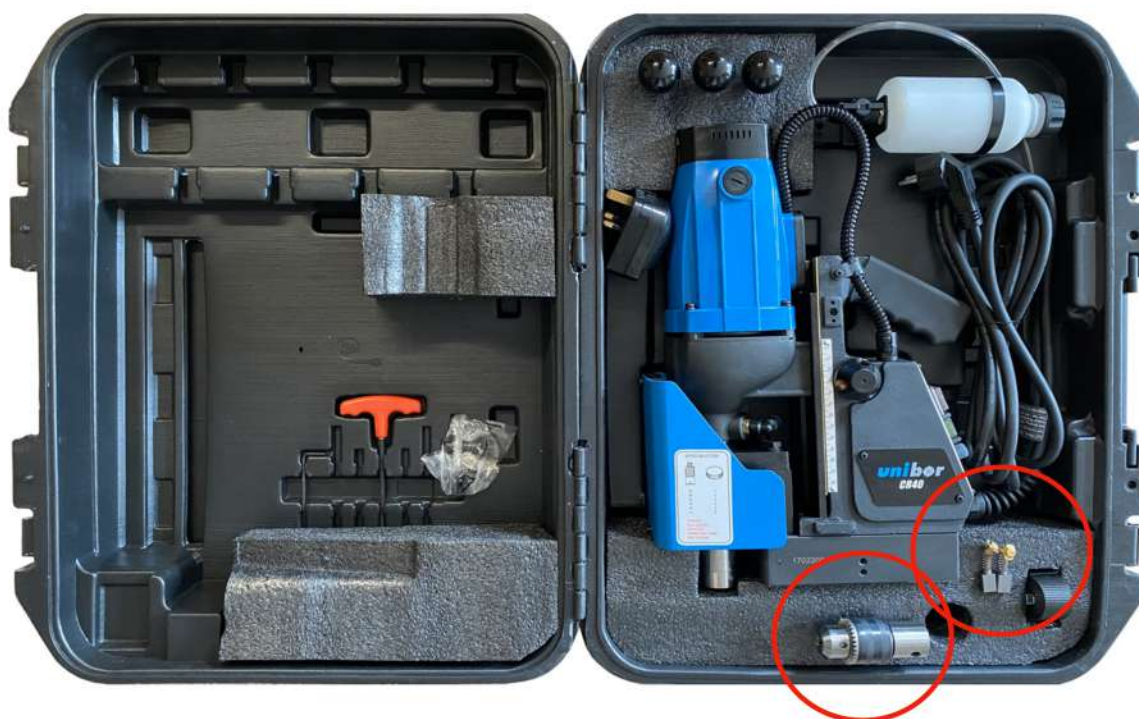

ROTELLA REGOLAZIONE GIRI



TABELLA SELEZIONE N. GIRI
IN FUNZIONE DEL DIAMETRO

SPEED SELECTION	
	
40	1
32	2
24	3
19	4
16	5
14	6

WARNING.
SLUG EJECTS AT
END OF CUT.
OPERATE ONLY WHEN
SAFE TO DO SO.